

10GBASE-LR SFP+ 1310nm 10km DOM Transceiver


A6515A-LL



Application

- 10GBASE-LR/LW 10G Ethernet
- 10GFC
- 8GFC

Product Function

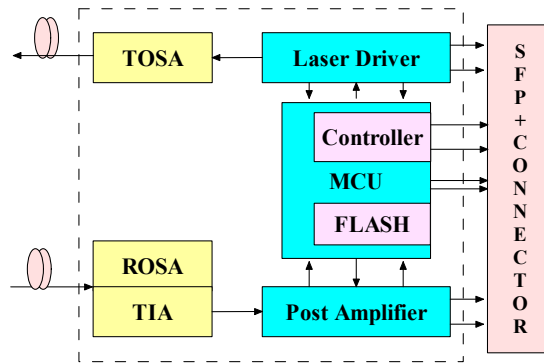

Product Specifications

I. Absolute Maximum Ratings

| Parameter | Symbol | Unit | Min | Max |
|----------------------------------|----------------|------|------|-----|
| Storage Temperature Range | T _s | °C | -40 | 85 |
| Relative Humidity | RH | % | 0 | 95 |
| Supply Voltage | VCC | V | -0.3 | 4.0 |

II. Recommended Operating Conditions

| Parameter | Symbol | Unit | Min | Typ | Max |
|---|-----------------|------|-------|-----|-------------------|
| Operating Case Temperature Range | T _c | °C | 0 | | 70 |
| Power Supply Voltage | V _{cc} | V | 3.135 | 3.3 | 3.465 |
| Bit Rate | BR | Gb/s | 8.5 | | 10.52 |
| Bit Error Ratio | BER | | | | 10 ⁻¹² |
| Max Supported Link Length | L | km | | | 10 |

III. Electric Ports Definition

| Parameter | Symbol | Unit | Min | Typ | Max | Note |
|---|----------|----------|----------|-----|--------------|------|
| Supply Voltage | V_{CC} | V | 3.135 | 3.3 | 3.465 | |
| Supply Current | I_{CC} | mA | | | 315 | |
| Transmitter | | | | | | |
| Input Differential Impedance | RIN | Ω | 80 | 100 | 120 | 1 |
| Differential Data Input Swing | VIN | mVp-p | 190 | | 700 | |
| Transmit Disable Voltage | VDIS | V | 2 | | V_{CCHOST} | |
| Transmit Enable Voltage | VEN | V | V_{EE} | | $V_{EE}+0.8$ | |
| Transmit Fault Assert Voltage | VFA | V | 2.2 | | V_{CCHOST} | |
| Transmit Fault De-Assert Voltage | VFDA | V | V_{EE} | | $V_{EE}+0.4$ | |
| Receiver | | | | | | |
| Differential Data Output Swing | VOD | mVp-p | 300 | | 850 | |
| LOS Fault | VLOSFT | V | 2.2 | | V_{CCHOST} | |
| LOS Normal | VLOSNR | V | V_{EE} | | $V_{EE}+0.4$ | |

Note:

1. Differential between TD+ / TD-

IV. Optical Characteristics


| Parameter | Min | Typ | Max | Units | Note |
|--|-------|------|-------|-------|------|
| Transmitter | | | | | |
| Nominal Wavelength | 1260 | 1310 | 1355 | nm | |
| Side Mode Suppression Ratio | 30 | | | dB | |
| Optical Modulation Amplitude | -5.2 | | | dBm | |
| Optical Output Power | -8.2 | | 0.5 | dBm | |
| Extinction Ratio | 3.5 | | | dB | |
| Transmitter and Dispersion Penalty | | | 3.2 | dB | |
| Average launch power of OFF transmitter | | | -30 | dBm | |
| Relative Intensity Noise | | | -128 | dB/Hz | |
| Optical Return Loss Tolerance | | | 12 | dB | |
| Spectral width | | | 1 | nm | |
| Receiver | | | | | |
| Center Wavelength | 1260 | | 1355 | nm | |
| Average Receiver Power | -14.4 | | +0.5 | dBm | 1 |
| Receiver Sensitivity (OMA) | | | -12.6 | dBm | 1 |
| Stressed Receiver Sensitivity (OMA) | | | -10.3 | dBm | 2 |

| | | | | | |
|-----------------------------|-----|--|-----|-----|--|
| Max Input power | 1.5 | | | dBm | |
| Receiver Reflectance | | | -12 | dB | |
| Assert LOS | -30 | | | dBm | |
| De-Assert LOS | | | -16 | dBm | |
| LOS Hysteresis | 0.5 | | | dB | |

Note:

1. Sensitivity for 10G PRBS 2³¹-1 and BER better than or equal to 10E-12
2. The stressed sensitivity value in the table are for system level BER measurements which include the effects of CDR circuit.

V. Pin function definitions

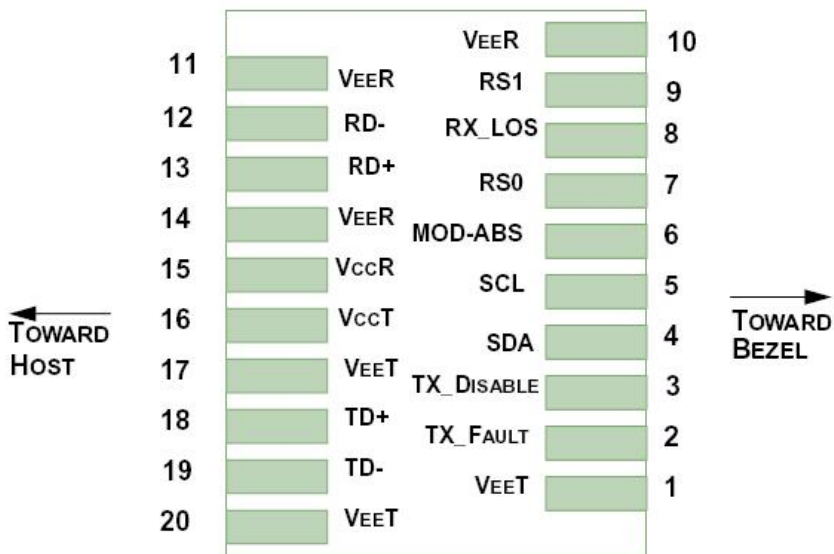

| Pin Number | Symbol | Name | Description |
|------------|------------|----------------------------------|--|
| 1,17,20 | VeeT | Transmitter Signal Ground | These pins should be connected to signal ground on the host board. |
| 2 | TX Fault | Transmitter Fault Out (OC) | Logic "1" Output = Laser Fault (Laser off before t_fault) Logic "0" Output = Normal Operation This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor. |
| 3 | TX Disable | Transmitter Disable In (LVTTTL) | Logic "1" Input (or no connection) = Laser off Logic "0" Input = Laser on This pin is internally pulled up to VccT with a 10 kΩ resistor. |
| 4 | SDA | Module Definition Identifiers | Serial ID with SFF 8472 Diagnostics Module Definition pins should be pulled up to Host Vcc with 10 kΩ resistors. |
| 5 | SCL | | |
| 6 | MOD-ABS | | |
| 7 | RS0 | Receiver Rate Select (LVTTTL) | These pins have an internal 33kΩ pull-down to ground. A signal on either of these pins will not affect module performance. |
| 9 | RS1 | Transmitter Rate Select (LVTTTL) | |
| 8 | LOS | Loss of Signal Out (OC) | Sufficient optical signal for potential BER < 1x10 ⁻¹² = Logic "0" Insufficient optical signal for potential BER < 1x10 ⁻¹² = Logic "1" This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor. |
| 10,11,14 | VeeR | Receiver Signal Ground | These pins should be connected to signal ground on the host board. |
| 12 | RD- | Receiver Negative DATA Out(CML) | Light on = Logic "0" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor. |

| | | | |
|----|------|-----------------------------------|--|
| 13 | RD+ | Receiver Positive DATA Out(CML) | Light on = Logic "1" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor. |
| 15 | VccR | Receiver Power Supply | This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter |
| 16 | VccT | Transmitter Power Supply | This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter |
| 18 | TD+ | Transmitter Positive DATA In(CML) | Logic "1" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor. |
| 19 | TD- | Transmitter Negative DATA In(CML) | Logic "0" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor. |

VI. ENVIRONMENTAL SAFETY

Compliant to ROHS6

VII. DIGITAL DIAGNOSTIC INTERFACE DEFINITION

The 2-wire serial interface addresses of the SFP+ module are 1010000x (A0h) and 1010001x (A2h).

