

1000BASE-CWDM SFP 1270nm~1610nm 40km Transceiver Module

SFP-2GIR-31-LL



Application

- Gigabit Ethernet
- 1 × Fiber Channel
- CWDM Networks

Features

- Up to 1.25Gb/s Data Links
- Hot-Pluggable
- Duplex LC connector
- Up to 40km on 9/125μm SMF
- 18-Wavelength CWDM 1270n~1610nm Available
- CWDM DFB laser transmitter
- Single +3.3V Power Supply
- Monitoring Interface Compliant with SFF-8472
- Low power dissipation <1W typically
- Operating temperature range: 0° C to 70° C
- RoHS compliant and Lead Free

Description

Longline's CWDM-SFP1G-ZX--LL CWDM Transceiver products provide optical networking equipment manufacturers with a timely and cost effective tool in supporting the unceasing demand for higher bandwidth equipment build-outs in the enterprise access and metropolitan area networks. There are 18 center wavelengths available from 1270nm to 1610nm. The 20nm channel spacing allows for un-cooled laser operation, a high yield manufacturing process, and lower cost Mux/Demux technology, thus providing a complete cost effective solution for various data and telecom applications.

Product Specifications

I. General Specifications

| Parameter | Symbol | Min | Typ. | Max | Unit | Ref. |
|--|--------|-----|------|-------|------|------|
| Data Rate | BR | | 1.25 | | Gb/s | |
| Bit Error Rate | BER | | | 10-12 | | |
| Max. Supported Link Length on 9/125μm SMF@1.25Gb/s | LMAX | | 40 | | km | |
| Total System Budget | LB | 19 | | | dB | |

II. Absolute Maximum Ratings

| Parameter | Symbol | Min | Typ. | Max | Unit | Ref. |
|----------------------------|--------|------|------|-----|--------------|------|
| Storage Temperature | TS | -40 | | +85 | $^{\circ}$ C | |
| Supply Voltage | VCC | -0.5 | | 4 | V | |
| Relative Humidity | RH | 0 | | 85 | % | |

III. Recommended Operating Environment

| Parameter | Symbol | Min | Typ. | Max | Unit | Ref. |
|-----------------------------------|--------------------|-------|------|---------------------|--------------|------|
| Case operating Temperature | Tc | 0 | | +70 | $^{\circ}$ C | |
| Supply Voltage | VCC | 3.135 | | 3.465 | V | |
| Supply Current | Icc | | | 250 | mA | |
| Inrush Current | I _{surge} | | | I _{cc} +30 | mA | |
| Maximum Power | P _{max} | | | 1 | W | |

IV. Electrical Characteristics (TOP = Tc, VCC = 3.135 to 3.465 Volts)

| Parameter | Symbol | Min | Typ. | Max | Unit | Ref. |
|-----------|--------|-----|------|-----|------|------|
|-----------|--------|-----|------|-----|------|------|

Transmitter

| | | | | | | |
|--------------------------------------|----------|-----------|-----|----------|-------|---|
| Input differential impedance | Rin | 90 | 100 | 110 | W | 1 |
| Single ended data input swing | Vin PP | 250 | | 1200 | mVp-p | |
| Transmit Disable Voltage | VD | Vcc – 1.3 | | Vcc | V | 2 |
| Transmit Enable Voltage | VEN | Vee | | Vee+ 0.8 | V | |
| Transmit Disable Assert Time | Tdessert | | | 10 | us | |

Receiver

| | | | | | | |
|---------------------------------------|-----------|-----------|--|----------|------|---|
| Single ended data output swing | Vout,pp | 300 | | 800 | mv | 3 |
| Data output rise time | tr | | | 260 | ps | 4 |
| Data output fall time | tf | | | 260 | ps | 4 |
| LOS Fault | Vlosfault | Vcc – 0.5 | | VCC_host | V | 5 |
| LOS Normal | Vlos norm | Vee | | Vee+0.5 | V | 5 |
| Power Supply Rejection | PSR | 100 | | | mVpp | 6 |

Notes:

1. AC coupled.
2. Or open circuit.
3. Into 100 ohm differential termination.
4. 20 – 80 %
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA), September 14, 2000.

V. Optical Characteristics(TOP =Tc, VCC = 3.135 to 3.465 Volts)

| Parameter | Symbol | Min | Typ. | Max | Unit | Ref. |
|--|---|---------------|-----------|---------------|------|------|
| Transmitter | | | | | | |
| Center Wavelength | λ_c | $\lambda-6.5$ | λ | $\lambda+6.5$ | nm | |
| Spectral Width | σ | | | 1 | nm | |
| Side Mode Suppression Ratio | SMSR | 30 | | | dB | |
| Optical Output Power | P _{out} | -5 | | 0 | dBm | 1 |
| Optical Rise/Fall Time | t _r / t _f | | | 260 | ps | 2 |
| Extinction Ratio | ER | 9 | | | dB | |
| Generated Jitter (peak to peak) | JTX _{p-p} | | | 0.07 | UI | 3 |
| Generated Jitter (rms) | JTX _{rms} | | | 0.007 | UI | 3 |
| Eye Mask for Optical Output | Compliant with IEEE802.3z(class 1 laser safety) | | | | | |
| Receiver | | | | | | |
| Optical Input Wavelength | λ_c | 1260 | | 1620 | nm | |
| Receiver Overload | Pol | -8 | | | dBm | 4 |
| RX Sensitivity | Sen | | | -24 | dBm | 4 |
| RX_LOS Assert | LOS A | -40 | | | dBm | |
| RX_LOS De-assert | LOS D | | | -25 | dBm | |
| RX_LOS Hysteresis | LOS H | 0.5 | | | dB | |

Notes:

1. The optical power is launched into SMF.
2. 20-80%.
3. Jitter measurements taken using Agilent OMNIBERT 718 in accordance with GR-253.
4. Measured with PRBS 27 -1at 10-12 BER

VI. Pin Assignment

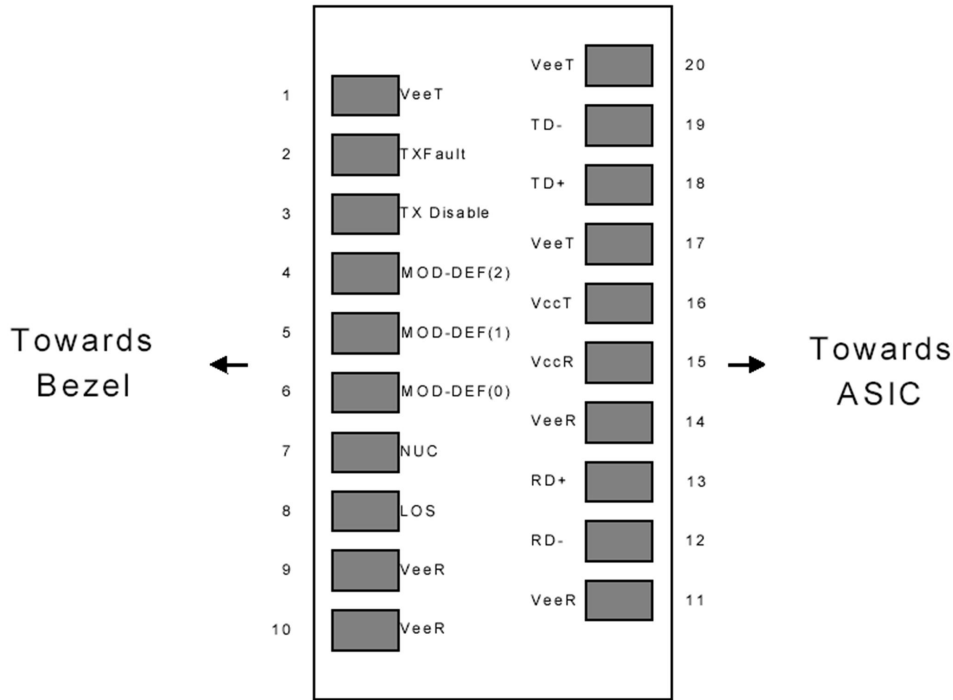


Figure1. Diagram of Host Board Connector Block Pin Numbers and Names

| Pin | Name | Function | Plug Seq | Notes |
|-----|-------------|------------------------------|----------|-------|
| 1 | VeeT | Transmitter Ground | 1 | 1 |
| 2 | TX Fault | Transmitter Fault Indication | 3 | |
| 3 | TX Disable | Transmitter Disable | 3 | 2 |
| 4 | MOD-DEF2 | Module Definition | 2 | 3 |
| 5 | MOD-DEF1 | Module Definition 1 | 3 | 3 |
| 6 | MOD-DEF0 | Module Definition 0 | 3 | 3 |
| 7 | Rate Select | Not Connected | 3 | 4 |
| 8 | LOS | Loss of Signal | 3 | 5 |

| | | | | |
|----|------|------------------------|---|---|
| 9 | VeeR | Receiver Ground | 1 | 1 |
| 10 | VeeR | Receiver Ground | 1 | 1 |
| 11 | VeeR | Receiver Ground | | 1 |
| 12 | RD- | Inv. Received Data Out | 3 | 6 |
| 13 | RD+ | Received Data Out | 3 | 6 |
| 14 | VeeR | Receiver Ground | 3 | 1 |
| 15 | VccR | Receiver Power | 2 | 1 |
| 16 | VccT | Transmitter Power | 2 | |
| 17 | VeeT | Transmitter Ground | 1 | |
| 18 | TD+ | Transmit Data In | 3 | 6 |
| 19 | TD- | Inv. Transmit In | 3 | 6 |
| 20 | VeeT | Transmitter Ground | 1 | |

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD_DEF(0) pulls line low to indicate module is plugged in.
4. Rate select is not used
5. LOS is open collector output. Should be pulled up with 4.7k – 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. AC Coupled

VII. Mechanical Specifications

